


VA 20

Curve

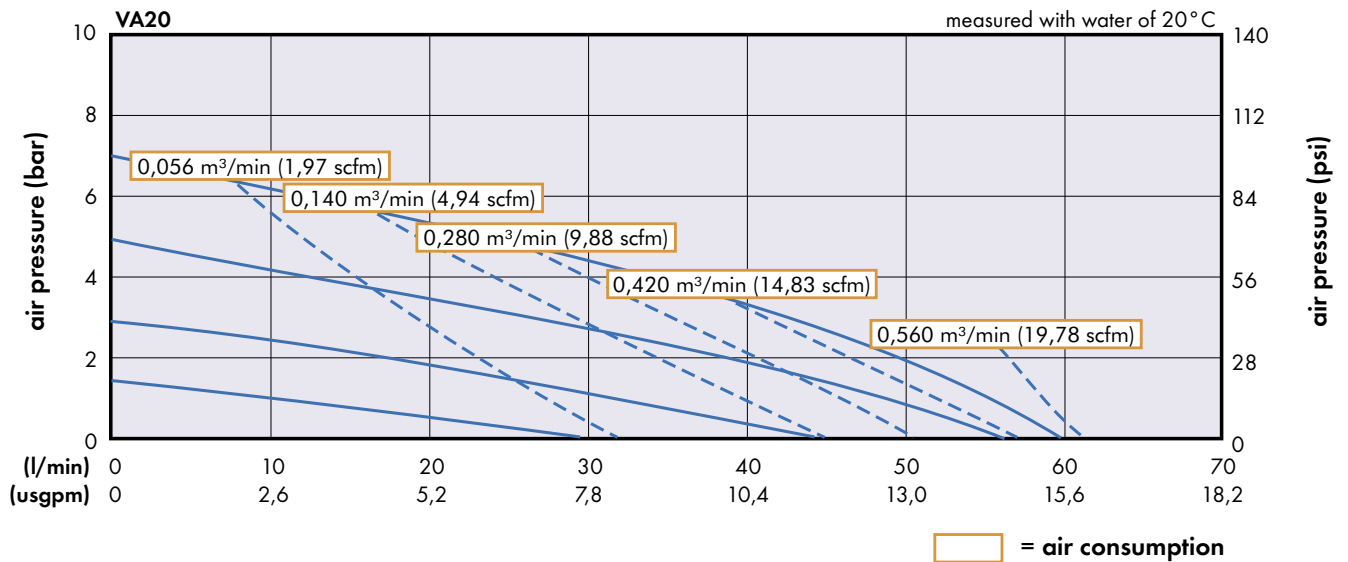



Technical details

Technical details		
Weight [kg]	Aluminum	3.9
	Stainless Steel	8.2
Suction lift [mwc]	Dry	4.8
	Wet	7.6
Temperature [°C]	Aluminium	5 - 65*
	Stainless Steel	5 - 65*
* 107°C with Teflon diaphragms		
Max. particle size [mm] 2.5		

Non wetted material	
Centre section	Epoxy coated Aluminium

Article codes	
VA 20. [no.2] . [no.3] . [no.4] . [no.5]	
[no.2] material of casing	
AL = Aluminium	
SS = Stainless Steel	
[no.3] material of seat	
AC = Acetal	
PP = Polypropylene	
KY = Kynar	
SS = Stainless Steel	
[no.4] material of valve	
TF = Teflon	
HY = Hytrel	
SP = Santoprene	
SS = Stainless Steel	
BN = Buna N	
VT = Viton	
[no.5] material of diaphragm	
TF = Teflon	
HY = Hytrel	
SP = Santoprene	
BN = Buna N	
VT = Viton	

Dimensions

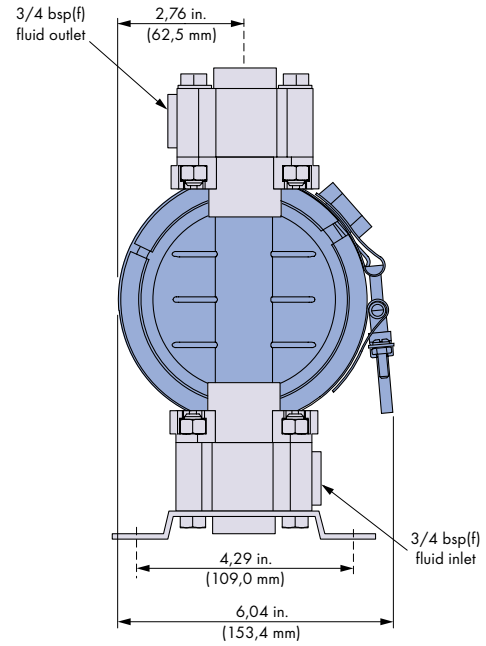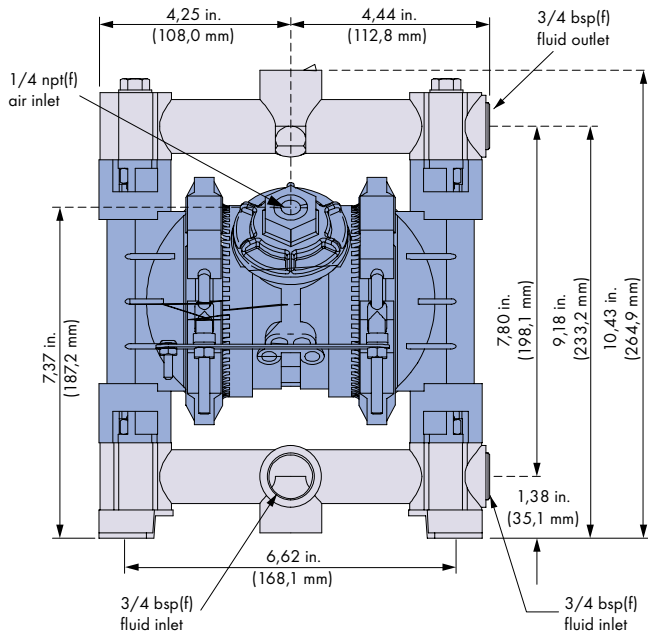

VERDER Group, VERDERAIR Products

Empo-Verder N.V., Kontichsesteenweg 17, B-2630 Aartselaar • Tel.: +32 (0)3 877 11 12 • Fax: +32 (0)3 877 05 75 • info@empo-verder.be • www.empo-verder.be

Affiliated companies: A Wien • B Aartselaar • CN Shanghai • CZ Praha • D Haan • F Eragny s/Oise • GB Leeds • H Budapest • JPN Tokyo
 NL Groningen/Vleuten • PL Katowice • RO Bucuresti • SA Kya Sand • SK Bratislava • USA Newtown