




# Solenoid interlock AZM 200 – The non-contact interlock

## System components



## System components

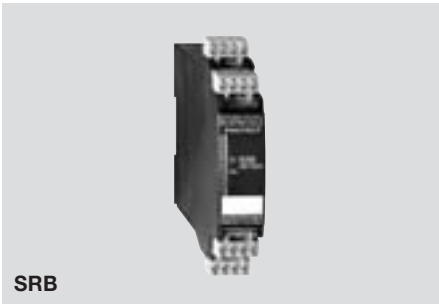

## Note

**Possible safety control modules**  
The safety outputs of the AZM 200 are p-type transistor outputs. Taking the self-test feature of these outputs into account, the safety control modules must tolerate a brief switching-off of the outputs. The cross-wire detection must be deactivated.

- The following modules allow for a trouble-free functioning in combination with the AZM 200:
- AES 1135
  - AES 1235
  - AZR 321 AR
  - SRB 324 ST
  - SRB 301 LC/B
  - SRB-NA-R-C.21
  - SRB-NA-R-C.22
  - ESALAN Compact

Further information about these devices can be found in our main catalogue "Safety Technology".

The modules and the structure of the entire safety circuit are determining the obtainable control categories.

## Ordering data

Door handle for actuator	G1
Rotary button for actuator	G2